



AL-CRHB-HW

SUPER SLIM UFO LED

HIGH BAY



GENERAL DESCRIPTION

High bay is the ideal light source for energy-efficient, low maintenance illumination in large spaces. Designed with durability and functionality in mind, the LED Round High Bay lighting options are versatile and suited to satisfy most all long-term lighting needs. The MHB05 delivers ultra-high luminous flux for use in large indoor environments with a clearance of more than 30 feet. Its high luminous efficiency features cost savings for customers and is favored by customers compared with similar products. The AL-CRHB is ideal for industrial and manufacturing applications, and is your LED replacement for up to 1000W MH fixtures.

CONSTRUCTION

- Durable, die-cast aluminum housing with heat dissipating fins.
- Dark bronze polyester powder-coat finish.
- Easy access to the driver compartment from the face.

OPTICS

- Efficiency higher than 171lm/W, designed to replace 750W and 1000W MH while consumes 350W and 410W.
- Light engines are available in standard 4000K, 5000K configurations.
- 120 degree lens guarantees light intensity and light uniformity.

ELECTRICAL

- Universal 120-277 VAC or 347-480 VAC input voltage.
- 0-10V dimming standard for a dimming range of 100% to 10%.
- Operating temperature is -40°C (-40°F) to 55°C (131°F) when Wattage is above 300W (Max. 65°C (149°F) for 300W and below).

MOUNTING

- 3/4" Conduit pendant, Hook mounting.

WARRANTY

- 10-year limited warranty.

Bluetooth



CONTROLS

- Optional PIR Sensor or Bluetooth Smart Control Sensor available for further energy-saving.
- Wattage Adjustment Dial allows more flexibility to suit for higher ambient or various light output requirement.

LIFESPAN

- Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

CERTIFICATIONS

- UL cUL wet location listed.
- DesignLights Consortium™ Qualified.
Note: Please refer to the DLC website for specific product qualifications at www.designlights.org.

NOTE

- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(±5°C) specifications subject to change without notice.

ORDERING INFORMATION

Fixture Type	Wattage	Voltage	CCT	Finish	Sensor (Option)	Adjustment Dial (Option)	Surge Protector (Option)	Internal Code
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
AL-CRHB High Bay	350W 410W	27V 120-277V 48V 347-480V	40K 4000K 50K 5000K	D Dark Bronze B Black W White	M With Sensor Blank Without Sensor	AD With Adjustment Dial Blank Without Adjustment Dial	S Surge Protector Blank Without Surge Protector	Blank Alphanumeric


PERFORMANCE DATA

SETTING	CRI	350W			TEMPERATURE
		SYSTEM WATTS	LUMENS	LPW	
100%	70	350W	62000lm	177lm/W	55°C
80%	70	280W	51000lm	182lm/W	65°C
60%	70	210W	39000lm	186lm/W	65°C
40%	70	140W	26600lm	190lm/W	65°C


SETTING	CRI	410W			TEMPERATURE
		SYSTEM WATTS	LUMENS	LPW	
100%	70	410W	72000lm	176lm/W	55°C
80%	70	328W	59000lm	180lm/W	55°C
60%	70	246W	45500lm	185lm/W	65°C
40%	70	164W	31000lm	189lm/W	65°C

DIMENSIONS

unit: mm/inch

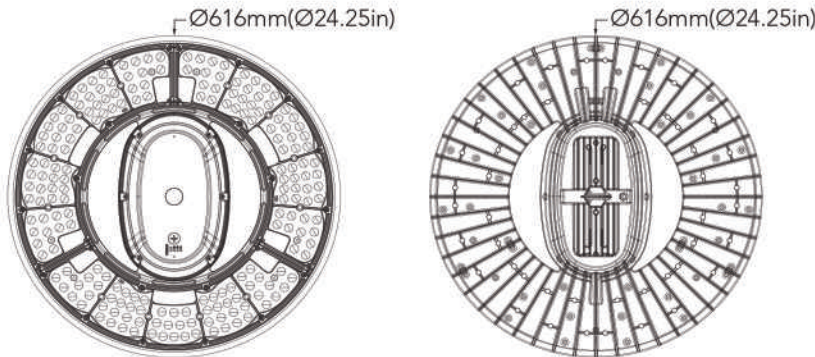

Weight:
350W: 7.858kg(17.324lbs)
410W: 8.833kg(19.473lbs)

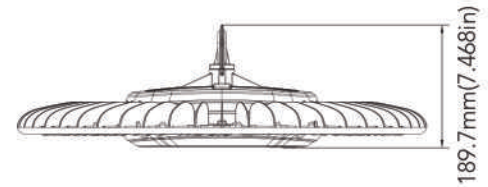

ACCESSORIES/MOUNTING

Plug-and-Play PIR Sensor PIR sensor: ANT-6-4T Bluetooth PIR sensor: ANT-6-4T-BLE-SR	Plug-and-Play Microwave Sensor Microwave sensor: ANT-5-4T Bluetooth microwave sensor: ANT-5-4T-BLE-SR

Note: Main Stocking SKU: ANT-6-4T.

	Hook Mount
	Conduit Pendant Mount