


LED RETROFIT DOWNLIGHT



GENERAL DESCRIPTION

- 1.4 inches and 6 inches. The spring of 6 inches can be adjusted to fit 5 inches ceiling hole.
- 2. With E26 lampbase, easy for installation and exactly designed for North America market.
- 3. UL, cUL, Energy Star, Lighting Facts, Title 24 approved.
- 4 . Triac dimmable.

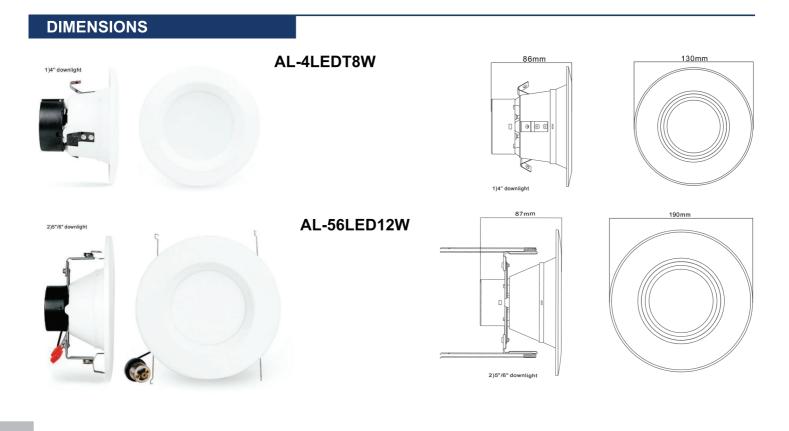

LIGHTING UP THE WORLD WITH ONE BULB AT A TIME!



ELECTRIC CHARACTERISTIC


Model No.	AL-4LEDT8W	AL-56LED12W		
Size	Dia.130*86mm	Dia.190*87mm		
Wattage	8W	12W		
LED Qty	15PCS	21PCS		
LED Type	SMD2835	SMD2835		
Efficacy	>90lm/W	>90lm/W		
CRI	>90	>90		
ССТ	2800-3200K 3900-4300K 4800-5300K	2800-3200K 3900-4300K 4800-5300K		
Lighting Angle	90 Degree	90 Degree		
Input Voltage	AC120V	AC120V		
Frequency	50/60Hz	50/60Hz		
Dimmable Type	Triac dimmable	Triac dimmable		
Material	Aluminum+PC	Aluminum+PC		
Lamp Base	E26	E26		
Net Weight	147g	227g		
IP Rate	IP40	IP40		
Working Temperature	-20~55℃	-20~55 ℃		
Storage Temperature	-40~60℃	-40~60 ℃		
Lifespan	50000h	50000h		
Warranty	5 Years	5 Years		
Certificates	UL ES	UL ES		

LIGHTING UP THE WORLD WITH ONE BULB AT A TIME!



LED RETROFIT DOWNLIGHT

LUMINOUS INTENSITY CHART

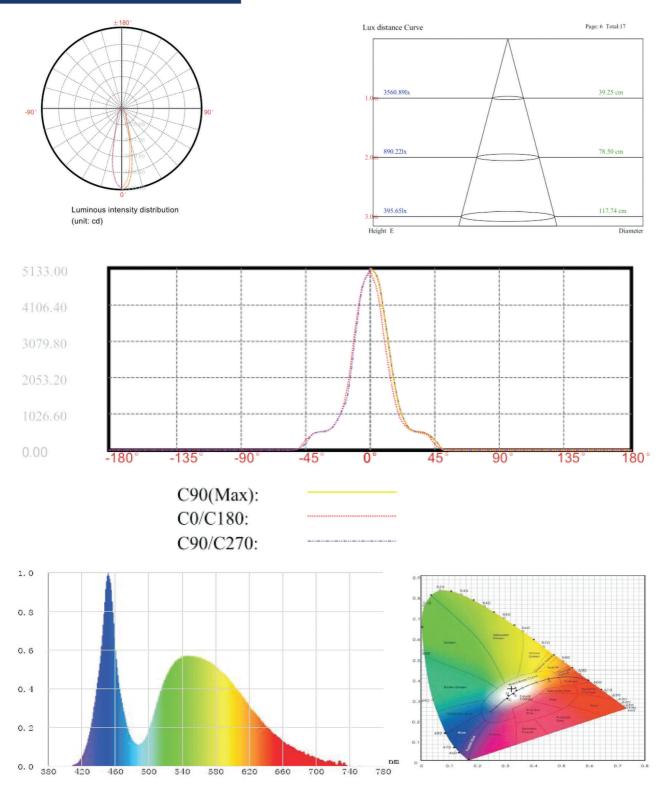


LIGHTING UP THE WORLD WITH ONE BULB AT A TIME!




SIZE DIAGRAM

Unit:mm





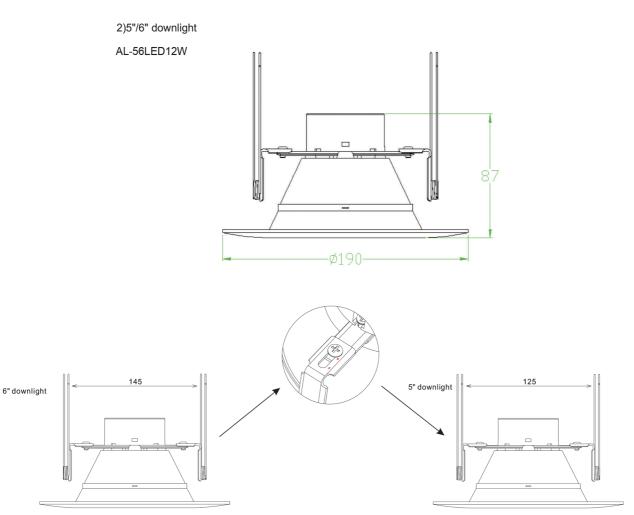

AL-4LEDT8W

AL-56LED12W

LIGHTING UP THE WORLD WITH ONE BULB AT A TIME!


LED RETROFIT


DOWNLIGHT




LED RETROFIT DOWNLIGHT

INSTALLATION





2




3

- 1.Cut off the electricity.
- 2. Take the traditional light out and pull the wire with E26 base off.
- 3.Screw the base into the original holder.
- 4.Connect the wire by connectors.
- 5.Install the light into the container.

PS: For further details, please refer to our installation instruction.

PACKAGING



ltem	Carton dimension	Quantity	N.W.	G.W.
4" Downlight	660*540*327mm(L*W*H)	60pcs/ctn	9.5kgs	14kgs
5"/6" Downlight	575*540*420mm(L*W*H)	40pcs/ctn	9.5kgs	15kgs