



FEATURES

- Aluminum housing with UV resistant powder coat finish
- 4 Different sizes
- Multiple mounting options
- UL wet location listed and DLC qualified
- Doorframe seals to housing with a continuous extruded silicone gasket
- 0-10V dimming optional

15W - 27W - 45W - 60W

INPUT VOLTAGE	110-277VAC
CRI	>70
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F ~ 104F
MOUNTING OPTIONS	KNUCKLE, TRUNNION

70W - 100W - 135W - 200W

INPUT VOLTAGE	110-277VAC
CRI	>70
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F ~ 104F
MOUNTING OPTIONS	SLIPFITTER, TRUNNION

ORDERING INFORMATION

15W - 27W

EXAMPLE: AL-LEDSFL-15W-50K-277V-KM

AL-LEDSFL	15W	50K	277V	-[BLANK]	-KM	-[BLANK]
SERIES	RATED WATTAGE		INPUT VOLTAGE		MOUNTING	
AL-LEDSFL	15W 15 WATT 27W 27 WATT	40K 4000KELVIN 50K 5000KELVIN	277 110 - 277 VAC	FINISHING BLANK DARK BRONZE	-KM -KNUCKLE MOUNT -TM -TRUNNION MOUNT	OPTIONS BLANK -NO PHOTOCCELL -PC -PHOTOCCELL

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!

ORDERING INFORMATION

45W - 60W

EXAMPLE: AL-LEDMFL-45W-50K-277V-KM

AL-LEDMFL	45W	50K	277V	-[BLANK]	-KM	-[BLANK]
SERIES AL-LEDSFL	RATED WATTAGE 45W 45 WATT 60W 60 WATT	COLOR TEMP 40K 4000KELVIN 50K 5000KELVIN	INPUT VOLTAGE 277 110 - 277 VAC	FINISHING BLANK DARK BRONZE	MOUNTING -KM -KNUCLE MOUNT -TM -TRUNNION MOUNT	OPTIONS BLANK -NO PHOTOCELL -PC -PHOTOCELL

70W - 100W

EXAMPLE: AL-LEDLFL-70W-50K-277V-SP

AL-LEDLFL	70W	50K	277V	-[BLANK]	-SP	-[BLANK]
SERIES AL-LEDLFL	RATED WATTAGE 70W 70 WATT 100W 100 WATT	COLOR TEMP 40K 4000KELVIN 50K 5000KELVIN	INPUT VOLTAGE 277 110 - 277 VAC	FINISHING BLANK DARK BRONZE	MOUNTING -SP -SLIPFITTER MOUNTING -TM -TRUNNION MOUNTING	OPTIONS BLANK -NO PHOTOCELL -PC -PHOTOCELL

135W - 200W


EXAMPLE: AL-LEDXLFL-135W-50K-277V-SP

AL-LEDXLFL	70W	50K	277V	-[BLANK]	-SP	-[BLANK]
SERIES AL-LEDXLFL	RATED WATTAGE 135W 135 WATT 200W 200 WATT	COLOR TEMP 40K 4000KELVIN 50K 5000KELVIN	INPUT VOLTAGE 277 110 - 277 VAC	FINISHING BLANK DARK BRONZE	MOUNTING -SP -SLIPFITTER MOUNTING -TM -TRUNNION MOUNTING	OPTIONS BLANK -NO PHOTOCELL -PC -PHOTOCELL


LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!

DIMENSIONS


15W - 27W

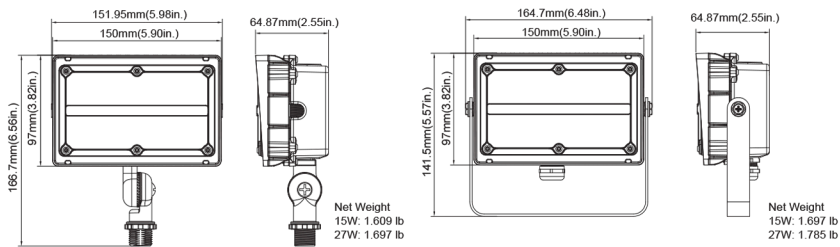


45W - 60W

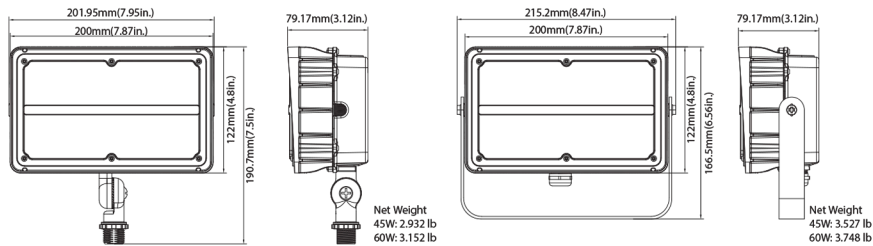

70W - 110W

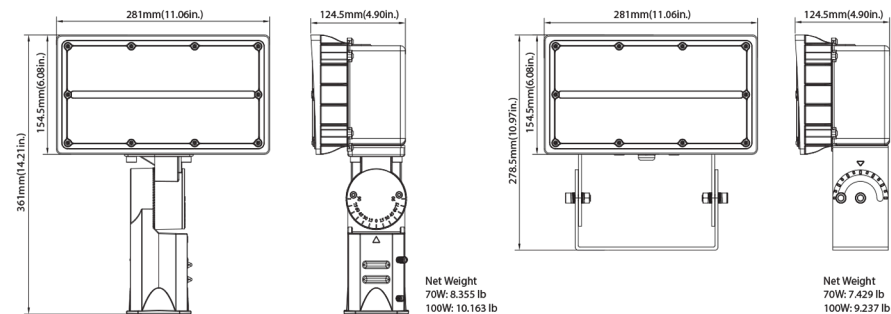

135W - 200W

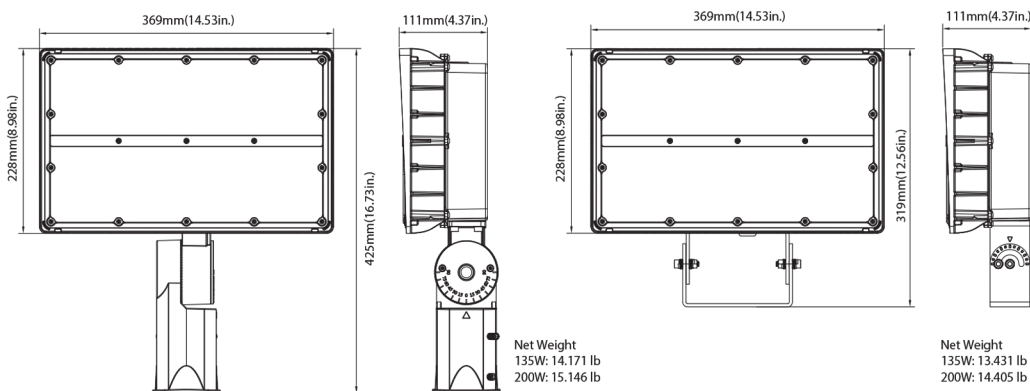

LIGHTING UP THE WORLD WITH ONE BULB AT A TIME!

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST. TYPE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
15W	120-277V	7HX6V	70	1950LM	130 LM/W	2000LM	133 LM/W	2000LM	133 LM/W
27W	120-277V	7HX6V	70	3500LM	130 LM/W	3600LM	133 LM/W	3600LM	133 LM/W
45W	120-277V	7HX6V	70	5550LM	123 LM/W	5650LM	126 LM/W	5650LM	126 LM/W
60W	120-277V	7HX6V	70	7250LM	121 LM/W	7450LM	124 LM/W	7450LM	124 LM/W
60W	347-480V	7HX6V	70	7500LM	125 LM/W	7600LM	127 LM/W	7600LM	127 LM/W
70W	120-277V	7HX6V	70	8700LM	124 LM/W	8900LM	127 LM/W	8900LM	127 LM/W
70W	347-480V	7HX6V	70	9100LM	130 LM/W	9300LM	133 LM/W	9300LM	133 LM/W
90W	347-480V	7HX6V	70	12000LM	133 LM/W	12400LM	138 LM/W	12400LM	138 LM/W
100W	120-277V	7HX6V	70	13100LM	131 LM/W	13300LM	133 LM/W	13300LM	133 LM/W
135W	120-277V/347-480V	7HX6V	70	17100LM	127 LM/W	17500LM	130 LM/W	17800LM	132 LM/W
200W	120-277V/347-480V	7HX6V	70	24600LM	123 LM/W	25600LM	128 LM/W	26000LM	130 LM/W

ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (MA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (AMPS)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	430	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	770	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	920	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22
1	1600	60	347	0.17
		60	480	0.13
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	1850	70	347	0.20
		70	480	0.15
1	2600	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
2	2400	90	347	0.26
		90	480	0.19
2	3500	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49
		135	347	0.39
		135	480	0.28
2	5000	200	120	1.67
		200	208	0.96
		200	240	0.83
		200	277	0.72
		200	347	0.58
		200	480	0.42

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!