



GENERAL DESCRIPTION

- Designed for new construction or retrofitting
- 5,000 Kelvin color, ambient daylight
- Available in Gold Amber light color
- Philips LED with self-developed Class 2 UL Driver
- Compatible with most street light poles, security light poles and landscape light poles
- Replaces 175W or 250W MH or HID light fixtures
- Photocell and extension arm included

Technical Data

CRI	>80
Beam Angle	120°
Operation Temp.	- 30°C ~ 60°C
Lifespan	50,000 Hours
Waterproof Rating	Wet Location
Lumen per watt	100 lm/w

ORDERING INFORMATION


Model #	CCT	Voltage	Wattage	Lumen
AL-LEDSPK45WYYK	3000-5000K	120-277 VAC	45W	4500lm
AL-LEDSPK70WYYK	3000-5000K	120-277VAC	70W	7000lm

YYK - 30K/40K/50K represent color temperature


PHOTOMETRICS

AL-LEDSPK45W50K

Luminous Intensity Distribution Curve

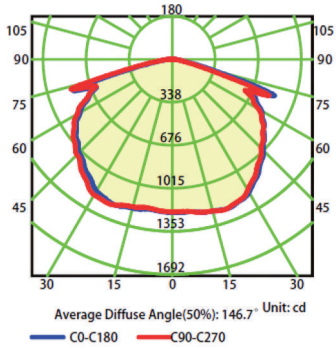


Illuminance at a Distance

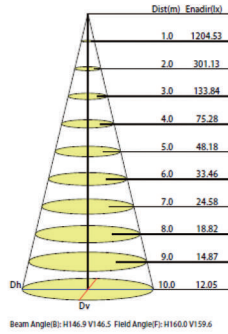


AL-LEDSPK70W50K



Luminous Intensity Distribution Curve

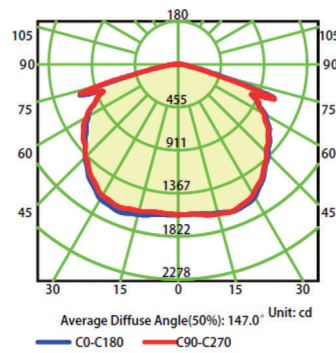

Illuminance at a Distance

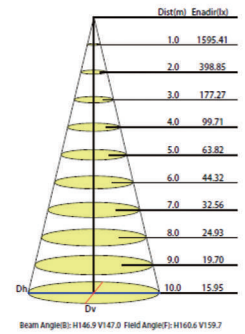


DIMENSIONS

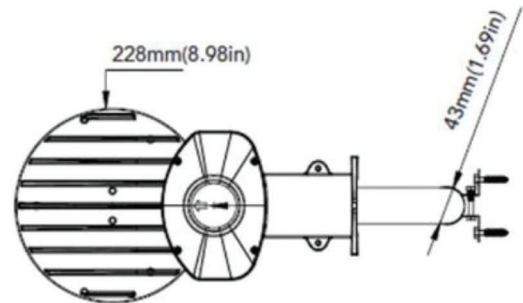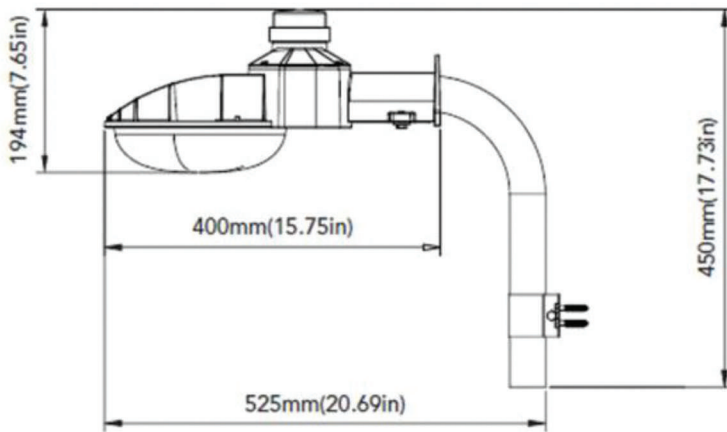


LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!

INSTALLATION

Direct Wall Mounting

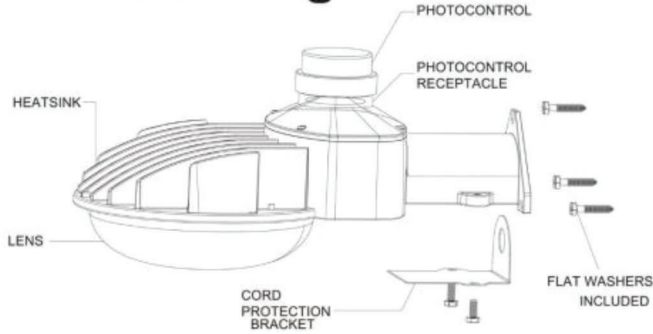

Arm Mounting

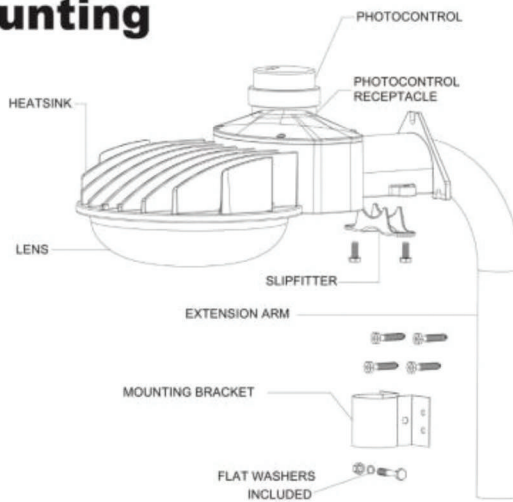

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!