



GENERAL DESCRIPTION

- Replaces 100w incandescent or 26w cfl fixture.
- Philips 3030 Led light source with class 2 ul led driver.
- Built with uv proof polycarbonate cover.

ELECTRIC CHARACTERISTIC

10W

INPUT VOLTAGE	110 - 277 VAC
CRI	>80
LUMEN PER WATT	100 LM/W
AVAILABLE CCT	3000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-22°F ~ 140°F
LUMEN	1000
MOUNTING OPTIONS	WALL MOUNT

15W

INPUT VOLTAGE	110 - 277 VAC
CRI	>80
LUMEN PER WATT	100 LM/W
AVAILABLE CCT	3000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-22°F ~ 140°F
LUMEN	1500
MOUNTING OPTIONS	WALL MOUNT

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!

ORDERING INFORMATION


10W - 15W

EXAMPLE: AL-LED SWM 10W 50K 277V

LED SWM	10W	50K	[BLANK]	[BLANK]	[BLANK]
SERIES	RATED WATTAGE		COLOR TEMP		INPUT VOLTAGE
AL	10W	10 WATT	30K	3000 KELVIN	BLANK 110 - 277 VAC
LED SWM	15W	15 WATT	50K	5000 KELVIN	
				FINISHING	OPTIONS
				BLANK DARK BRONZE	-PC INTERNAL PHOTOCELL
				WH WHITE	
				NK NICKEL	

DIMENSIONS

Weight: 2.30 lbs

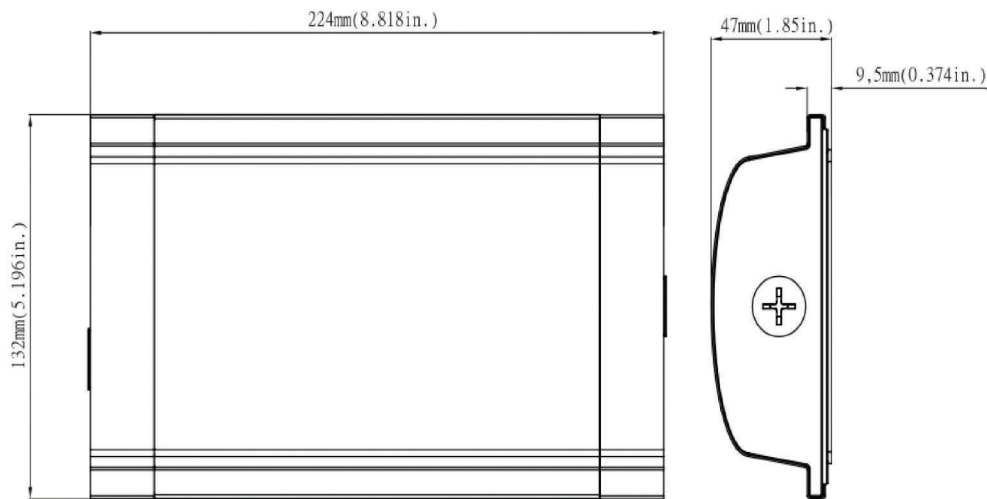

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!