



### GENERAL DESCRIPTION

APEX LIGHTING LED SHOEBBOX LIGHT series can be widely used in outdoor lighting(Wet location),Excellent for Museums, Art Galleries, Underground parking lot, Buildings,The lawn, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools and etc,and many more applications.

### FEATURES

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V/AC200-480V.
- Die Cast aluminium cooling design,high quality and better cooling for LED Tj < 85°C. Excellent
- Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

### ORDERING INFORMATION

**Example:AL-SB06W27-XXK-Z[D,W,B,S]-TN[T2,T3,T4,T5]-U[S,A,T]-Y[Blank,P]-#[Blank,M]**

AL	SB	06W	27	XXK	Z	TN	U	Y	#
Company	Product	Power	Voltage	Color Temp	Finish	Light Angle	Mounting Mean	Control	Control
	SB	06W(60W)	27	40K(4000K)	D(Dark Bronze)	T2(Type II)	S(slip fitter)	P	M
APEX LIGHTING	SHOEBBOX		AC120-277V	50K(5000K)	W(White)	T3(Type III)	A(Arm)	Photocell	Motion sensor
			48	±500K	B(Black)	T4(Type IV)	T(Trunnion)		
			AC200-480V		S(Silvery)	T5(Type V)			




LIGHTING UP THE WORLD  
WITH ONE BULB AT A TIME!

### ELECTRIC CHARACTERISTICS

#### AL-SB06W27-XXK-Z-TN-U-Y-#

Power	60W	Lighting Angle	Type II, III, IV, V
Input Voltage	AC120-277/AC200-480V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	8700Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	3 core , 18AWG
Optional dimming function	1-10Vdc		

### PHOTOMETRICS

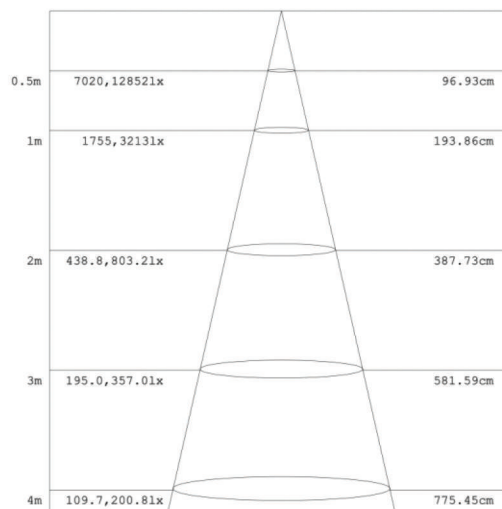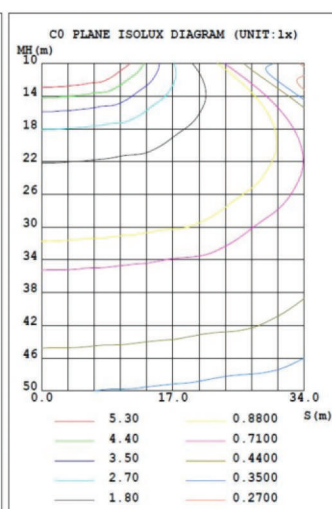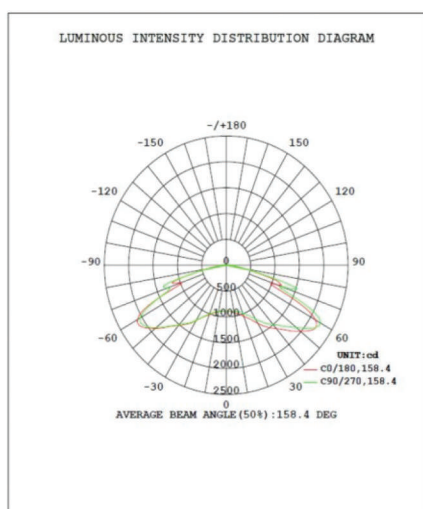


### Specifications

Unit : inch(mm)

#### Structure Features

- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/White
- Net weight : 4.5Kg (9.9 lbs)
- Product Size: 603mm\*282mm\*160mm
- Carton Size: 570mm\*350mm\*150mm

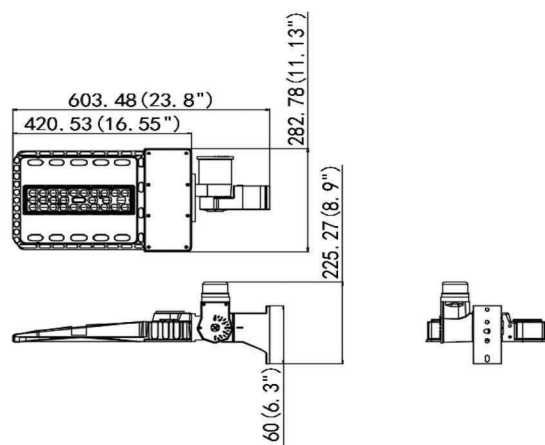

LIGHTING UP THE WORLD  
WITH ONE BULB AT A TIME!