

NO WIRING

NO ELECTRICITY

NO BATTERIES

NO MAINTENANCE

### FEATURES

- Vandal resistant
- Operating temperature -22°F to 149°F
- Explosion Proof (not a source of ignition)
- Impervious to water
- Requires no wiring
- Installs in minutes
- Suitable for clean room applications
- No bulbs to fail or replace
- Corrosion resistant
- Fail safe
- Recyclable if returned to manufacturer
- Lightweight
- 10 or 20 year life
- Totally self powered
- Manufactured in an ISO 9001 facility



### SPECIFICATIONS

#### ILLUMINATION SOURCE (Betalights)

- Borosilicate (hard) glass.
- Internally coated with phosphorescent powder.
- Filled with tritium gas.

#### BRIGHTNESS

- Minimum brightness at time of manufacture of 120  $\mu$ L (10 year) and 240  $\mu$ L (20 year).
- Rated viewing distance of 100 feet.
- Service life of 10 or 20 years.

#### COMPLIES WITH


- UL 924
- CAN/ULC-S572
- BS 5499: Part 2: 1986

#### CONSTRUCTION


- Encased in high-impact, fire-retardant ABS plastic

### INSTALLATION


1. Case
2. Reflector & Lights
3. Diffuser
4. Legend sheet
5. Clear Window
6. Frame
7. Frame Release Button

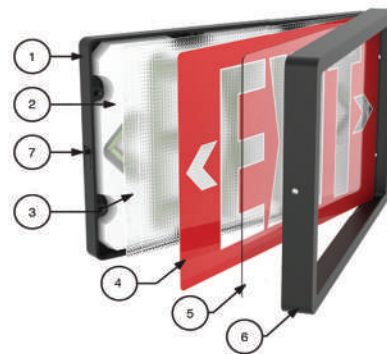


Remove the Frame, Clear Window, and Legend, then, using the 2 screws provided select the best two surface mounting holes for your application.

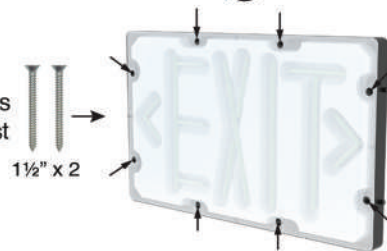

Bracket placement for Flag and Ceiling Mounting.

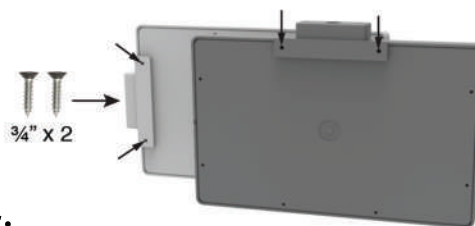

### DIMENSIONS:

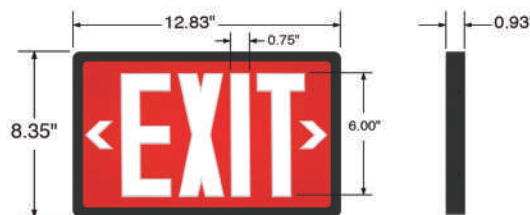

### ORDERING INFORMATION

MODEL	SERVICE LIFE	FRAME COLOUR	FACES	LEGEND COLOUR
BETALUX-E	10 Years	GY - Grey	S - Single	RD - Red
	20 Years	BK - Black	D - Double	GN - Green
		WH - White		

### ACCESSORIES

WG - Wire Guard	AF - Aluminum Frame	PW - Polycarbonate Window	PM - Pendant Mount	SC - Security Cover
-----------------	---------------------	---------------------------	--------------------	---------------------

**Ordering Example:** BETALUX-E-20-BK-S-GN = BETALUX-E, 20 year, black frame, single face with green legend.