



### FEATURES

- The cover and outer housing are sealed with high elasticity rubber and waterproof silicone rubber, and the protection rate can reach IP65.
- 6063 aluminum alloy housing used with high thermostability, high anti-impact strength and good toughness.
- No mercury allowing for non-hazardous waste materials
- Instant illumination, no flicker, no buzz
- No UV emission



### ELECTRIC CHARACTERISTIC


Model	AL-TPL-20WAN-YYK
Power	20W
Luminous Efficiency	120lm/w±5%
Voltage	AC100-277V
Frequency	50/60Hz
PF	>0.95
CCT	3000-6500K
CRI	80Ra
Protection Grade	IP65
Housing Material	AL+PC
Working Temperature	-40°C ~ +60°C
Life Span	>50,000hrs
Warranty	5 years
Certificate	DLC ETL CE RoHs

### INSTALLATION

#### Ceiling mounting



#### Suspending

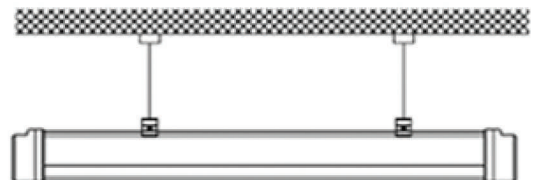

LIGHTING UP THE WORLD  
WITH ONE BULB AT A TIME!