



PC



GLASS

FEATURES

1. The appearance adopted stream-line design.
2. In put voltage: AC 120-277V | AC 120-34 7V / AC277-480V.
3. IP65 internal driver.
4. The driver is attached on the lamp housing tightly, driver temperature reduce 5-10 °C.
5. Die-casting cooling design, better cooling light quality.
6. No UV or IR in the beam.
7. Photocell sensor and Surge protector is available.
8. Easy to install and operate.
9. Light is soft and uniform, safe to eyes.
10. Energy saving long lifespan.
11. Instant start, NO flickering, NO humming.
12. Green and eco-friendly without mercury.

APPLICATION

LED Wall Pack series can be widely used in indoor or outdoor lighting (Wet location), like mechanical or electronic processing workshops, storage warehouses, house, building exterior, steel mills, toll booth, waiting rooms, the platforms of railway station, indoor stadiums etc.



Photocell sensor





Surge protector

and are available.

Complete certifications:
UL/FCC/RoHS/IP65/DLC Premium certificate

DIMENSIONS

Size: Inch/mm Structure Features
Shell materials: Aluminum & PC/Glass.
Finish: Brown

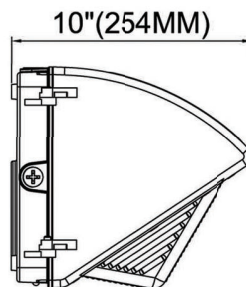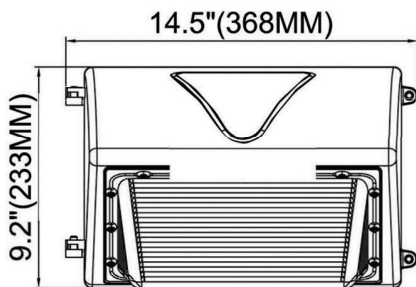

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!

TECHNICAL PARAMETERS

Model	Power	Materials	Light Efficiency	Input Voltage	Power Factor	Luminous Flux	CRI	Beam Angle	IP Rate	Dimension
AL-WPH277-30ABCDEF-01 AL-WPH347-30ABCDEF-01 AL-WPH480-30ABCDEF-01	30W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	3600-3900lm	>80	110°	IP65	368*233*254mm
AL-WPH277-40ABCDEF-01 AL-WPH347-40ABCDEF-01 AL-WPH480-40ABCDEF-01	40W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	4800-5200lm	>80	110°	IP65	368*233*254mm
AL-WPH277-45ABCDEF-01 AL-WPH347-45ABCDEF-01 AL-WPH480-45ABCDEF-01	45W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	5400-5850lm	>80	110°	IP65	368*233*254mm
AL-WPH277-50ABCDEF-01 AL-WPH347-50ABCDEF-01 AL-WPH480-50ABCDEF-01	50W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	6000-6500lm	>80	110°	IP65	368*233*254mm
AL-WPH277-60ABCDEF-01 AL-WPH347-60ABCDEF-01 AL-WPH480-60ABCDEF-01	60W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	7200-7800lm	>80	110°	IP65	368*233*254mm
AL-WPH277-70ABCDEF-01 AL-WPH347-70ABCDEF-01 AL-WPH480-70ABCDEF-01	70W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	8400-9100lm	>80	110°	IP65	368*233*254mm
AL-WPH277-80ABCDEF-01 AL-WPH347-80ABCDEF-01 AL-WPH480-80ABCDEF-01	80W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	9600-10400lm	>80	110°	IP65	368*233*254mm
AL-WPH277-90ABCDEF-01 AL-WPH347-90ABCDEF-01 AL-WPH480-90ABCDEF-01	90W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	10800-11700lm	>80	110°	IP65	368*233*254mm
AL-WPH277-100ABCDEF-01 AL-WPH347-100ABCDEF-01 AL-WPH480-100ABCDEF-01	100W	PC/GLASS	120-130lm/w	AC120-277V AC120-347V AC120-480V	>0.9	12000-13000lm	>80	110°	IP65	368*233*254mm
AL-WPH277-120ABCDEF-01 AL-WPH480-120ABCDEF-01	120W	PC/GLASS	120-130lm/w	AC120-277V AC120-480V	>0.9	14400-15600lm	>80	110°	IP65	368*233*254mm

PACKING DETAILS

Model	Power	N.W.	Inner Box Dimension	G.W.	Qty/ctn	Outer Carton Dimension
AL-WPH277-30ABCDEF-01 AL-WPH347-30ABCDEF-01 AL-WPH480-30ABCDEF-01	30W	PC:3.4KG±0.2KG Glass:4.1KG±0.2KG	—	PC:4.5KG±0.2KG Glass:5.2KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-40ABCDEF-01 AL-WPH347-40ABCDEF-01 AL-WPH480-40ABCDEF-01	40W	PC:3.4KG±0.2KG Glass:4.1KG±0.2KG	—	PC:4.5KG±0.2KG Glass:5.2KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-45ABCDEF-01 AL-WPH347-45ABCDEF-01 AL-WPH480-45ABCDEF-01	45W	PC:3.4KG±0.2KG Glass:4.1KG±0.2KG	—	PC:4.5KG±0.2KG Glass:5.2KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-50ABCDEF-01 AL-WPH347-50ABCDEF-01 AL-WPH480-50ABCDEF-01	50W	PC:3.4KG±0.2KG Glass:4.1KG±0.2KG	—	PC:4.5KG±0.2KG Glass:5.2KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-60ABCDEF-01 AL-WPH347-60ABCDEF-01 AL-WPH480-60ABCDEF-01	60W	PC:3.5KG±0.2KG Glass:4.2KG±0.2KG	—	PC:4.6KG±0.2KG Glass:5.3KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-70ABCDEF-01 AL-WPH347-70ABCDEF-01 AL-WPH480-70ABCDEF-01	70W	PC:3.5KG±0.2KG Glass:4.2KG±0.2KG	—	PC:4.6KG±0.2KG Glass:5.3KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-80ABCDEF-01 AL-WPH347-80ABCDEF-01 AL-WPH480-80ABCDEF-01	80W	PC:3.6KG±0.2KG Glass:4.3KG±0.2KG	—	PC:4.7KG±0.2KG Glass:5.4KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-90ABCDEF-01 AL-WPH347-90ABCDEF-01 AL-WPH480-90ABCDEF-01	90W	PC:3.6KG±0.2KG Glass:4.3KG±0.2KG	—	PC:4.7KG±0.2KG Glass:5.4KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-100ABCDEF-01 AL-WPH347-100ABCDEF-01 AL-WPH480-100ABCDEF-01	100W	PC:4KG±0.2KG Glass:4.7KG±0.2KG	—	PC:5.1KG±0.2KG Glass:5.8KG±0.2KG	1PCS	415*285*310mm
AL-WPH277-120ABCDEF-01 AL-WPH480-120ABCDEF-01	120W	PC:4.2KG±0.2KG Glass:4.9KG±0.2KG	—	PC:5.3KG±0.2KG Glass:6KG±0.2KG	1PCS	415*285*310mm

LIGHTING UP THE WORLD
WITH ONE BULB AT A TIME!